


# Transform Your Practice with the Robust eCO2

Lutronic's eCO2 is the premier fractional ablative laser that delivers the full spectrum of rejuvenating treatments to your busy practice. You will appreciate how easy to use and reliable the system is while your patients rave about their outcomes.

## MINIMAL DOWNTIME, IMPROVED PATIENT COMFORT

The eCO2 features the patented Controlled Chaos Technology (CCT™), an algorithm to pseudo-randomly deliver each micro laser beam and by placing maximum distance between sequential beams the system eliminates cross thermal diffusion between adjacent Micro-ablative Columns (MACs).

This allows the tissue to maximize heat dissipation between shots. The result is an increased safety profile with a reduction in post-operative discomfort and faster healing time with unparalleled fractional resurfacing results.



## PROVIDE THE RESULTS YOUR PATIENTS DEMAND





ACNE SCARS - COURTESY OF JEFFERY A. RAPAPORT, MD






WRINKLES & SKIN LAXITY - COURTESY OF J. DAVID HOLCOMB, MD

#### **APPLICATIONS**

- Wrinkles & Rhytids
- Skin Laxity/Loose Skin
- Skin Rejuvenation
- Scars
- Dyschromia
- Photoaging Skin
- Nevus
- Warts
- Seborrheic Keratosis
- Transepidermal Drug Delivery
- Hypomelanosis
- Syringoma
- Striae
- Refractory Vitiligo
- And More

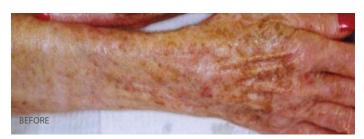



DYSCHROMIA - COURTESY OF MARK RUBIN, MD







DYNAMIC MODE

STATIC MODE

**Dynamic Mode** completely eliminates the checkerboard look of other CO<sub>2</sub> systems and provides clinicians with a more comfortable operation by allowing the user to **'air brush'** the energy. Whether your treating large areas or just feathering to eliminate demarcation lines, **Dynamic mode** provides your patients with a more natural look.

**Static Mode** allows for traditional **'Stamping'** which allows users to treat scanned areas of 18 x 18 mm with selectable density options to enable precise delivery of laser energy without the need for multiple passes other systems require.





RANDOM

REGULAR

The eCO2 allows you to control how you want to lay the energy down, choose from a pre-programed regular pattern or random pattern. In either mode the laser energy will be distributed using Controlled Chaos Technology.



#### **OUICK-CHANGE TIPS WITH AUTO-RECOGNITION**

From ultra-deep to superficial ablation, the eCO2 has the features you need to address a broad range of clinical conditions. The ultra-fast quick change tips come in a choice of three spot sizes, 120, 300 and 500 µm, allowing you on-the-fly customized treatments. The eCO2's tip auto-recognition feature automatically changes treatment settings to adjust for the change in spot size. Combined together, the advanced technology, quick-change tips and safety features ensure the ultimate control for the best outcomes.


## 120 µm Tip

- Scars
- Deep Wrinkles
- Tightening





#### **DENSITY CONTROL**







Choose your density and eliminate the need for multiple passes and the clinical disadvantages of unavoidable overlap. The end result is a single pass treatment customized for your patient.

# SUPER-PULSE AND CHAR-FREE (ULTRA-PULSE) MODES

With the ability to control your thermal damage, you can further adjust and customize treatments to your patients needs.

# 300 μm Tip

- Large Pores
- Skin Texture
- Luminosity





# 500 μm Tip

- Skin Tone
- Texture
- Luminosity





"The laser is efficient, fast and stable. We can do scar cases on the spot as part of our daily patient flow. In a busy practice like ours, time really is money."

David B. Vasily, M.D., F.A.A.D. Lehigh Valley Dermatology Associates Aesthetica Cosmetic and Laser Center Bethlehem, PA.

#### WHY eCO2?

- Low risk, high safety, rapid recovery and low downtime are attractive to patients
- · Controlled Chaos Technology creates pseudo-random microwound patterns to minimize heat build-up and maximize patient comfort
- Capable of delivering fractional, full field ablative, incisional and excisional laser treatments\*
- Proven reliability
- Easily adjust treatment parameters through intuitive and user-friendly interface
- Two energy delivery modes (dynamic and static) further increase versatility and control over outcomes
- No consumables reduces operating cost and improves ROI

#### **SYSTEM SPECIFICATIONS\***

|                            | PERFORMANCE                             |              | SYSTEM SPECIFICATION                                   |                        |  |
|----------------------------|---|--------------|--|------------------------|--|
|                            | Laser Wavelength                        |              | 10.6 μm  |                        |  |
|                            | Medium of Transmission                  |              | Sealed Off CO2 RF Module Laser**                       |                        |  |
|                            | Laser Transfer Method                   |              | Articulated Arm with Scanner or Conventional Handpiece |                        |  |
|                            | CO <sub>2</sub> RF Module Maximum Power |              | Maximum 30 Watt at Continuous Wave                     |                        |  |
|                            | Fractional<br>Scanner<br>Handpiece      | User Mode    | Static (Stamping) / Dynamic (Air Brushing)             |                        |  |
|                            |   | Tip          | 120, 300 & 500 um spot sizes                           |                        |  |
|                            |   | Pulse Energy | 2 mJ - 240 mJ  |                        |  |
|                            |   | Pulse Rate   | 10 Hz - 200 Hz   |                        |  |
|                            |   | Density      | 25 - 400 spots/cm <sup>2</sup>                         |                        |  |
|                            |   | Scan Area    | 18 x 18 mm   |                        |  |
|                            |   | Scan Shapes  | Point Beam"  |                        |  |
|                            | Normal<br>Handpiece                     | User Mode    | Char Free (Ultra Pulse) / Super Pulse / CW             |                        |  |
|                            |   | Pulse Rate   | Char Free (Ultra Pulse)                                | 1 Hz - 700 Hz          |  |
|                            |   |              | Super Pulse  | 1 Hz - 550 Hz          |  |
|                            |   | Pulse Width  | Char Free (Ultra Pulse)                                | 40 μs - 1000 μs        |  |
|                            |   |              | Super Pulse  | 1 ms - 5 ms            |  |
|                            |   | CW           | ON Time  | CONT. 0.01 s - 1.0 s   |  |
|                            | (Available on Plus model)               |              | OFF Time   | SINGLE 0.001 s - 1.0 s |  |
|                            | Dimensions (mm)                         |              | 360 (W) x 450 (W) x 1870 (H)                           |                        |  |
| Weight (excluding the arm) |   | 48 kg        |  |                        |  |



**Lutronic Corporation** 

Lutronic Center, 219 Sowon-ro, Deogyang-gu, Goyang-si, Gyeonggi-do, KOREA TEL. +82 31 908 3440 - FAX. +82 1600 3660 - office@lutronic.com